


## UTD1000L SERIES HANDHELD DIGITAL STORAGE OSCILLOSCOPES



● UTD1050CL

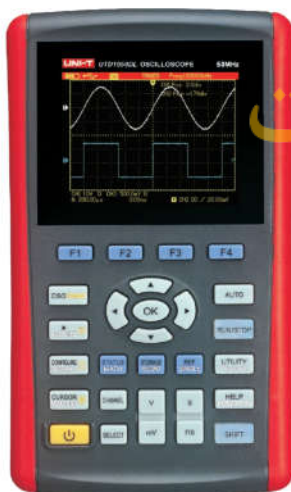

● UTD1050DL

	UTD1025CL	UTD1050CL	UTD1025DL	UTD1050DL
Bandwidth	25MHz	50MHz	25MHz	50MHz
Channels	1		2	
Sampling rate	250MS/s			
Rise time	≤14ns	≤7ns	≤14ns	≤7ns
Memory depth	12kpts			
Vertical scale (V/div)	5mV/div~20V/div			
Time base scale (s/div)	10ns/div~50s/div	5ns/div~50s/div	10ns/div~50s/div	5ns/div~50s/div
Storage methods	Setup, waveform, bitmap			
Trigger types	Edge, pulse width, video, slope			
Interface	Mini USB			
<b>Multimeter Specifications</b>	<b>Range</b>			<b>Accuracy</b>
DC voltage (V)	400V			±(1%+5)
AC voltage (V)	400V			±(1.2%+5)
DC current (A)	400μA/ 4000μA			±(1.2%+5)
	40mA/ 4000mA			±(1%+5)
AC current (A)	4A			±(1.5%+5)
	400μA/ 4000μA			±(2%+5)
Resistance (Ω)	40mA/ 4000mA			±(1.5%+5)
	4A			±(2.5%+5)
Capacitance (F)	400Ω/4kΩ/40kΩ/400kΩ/4MΩ			±(1.2%+5)
	40MΩ			±(1.5%+5)
Display count	4000			
Power	Li-ion battery: 7.4V 3600mAh; DC adapter: 100V~240V, 50/60Hz input, 9V/4A output			
Display	3.5 inches 64k TFT LCD, 320 x 240			
Product color	Red and grey			
Product net weight	0.9kg			
Product size	199mm x 118 mm x 49mm			
Standard accessories	Probe x 1 (1x, 10x switchable) (UTD1000CL), power cord, adaptor, Probe x 2 (1x, 10x switchable) (UTD1000DL), USB interface cable, current-to-voltage convertor, PC software CD, test leads			
Standard individual packing	Carton box, carrying bag			
Standard quantity per carton	UTD1000CL: 6pcs; UTD1000DL: 2pcs			
Standard carton measurement	UTD1000CL: 515mm x 295mm x 315mm UTD1000DL: 305mm x 190mm x 330mm			
Standard carton gross weight	UTD1000CL: 9.2kg; UTD1000DL: 5.5kg			

www.sazehgostar.com

@sazehgostar\_paytakht